
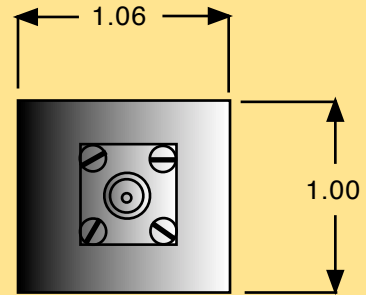


4410-A Hawkins St. NE
 Albuquerque New Mexico 87109
 (505) 345-1486 / Fax (928) 776-4208
 e-mail: sales@filteklfilters.com

**Lumped Element Highpass
 HP11 Series
 10 to 450 MHz**

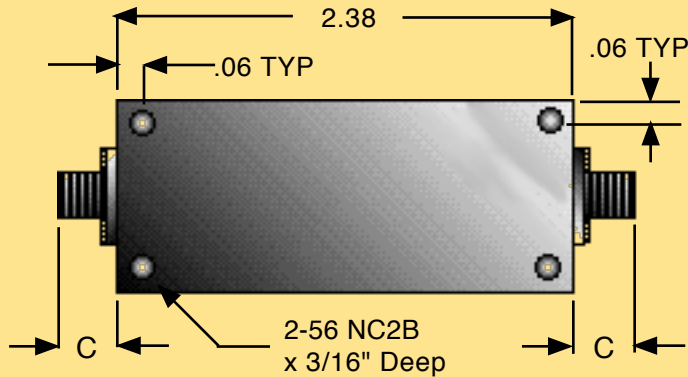

See Page 12 in the full catalog for 'C' dimensions and other connector configurations. The size shown is a standard used by FILTEK to facilitate a low cost, easily reproducible unit. Should you require another size, please submit all of your requirements - both electrical and mechanical. This will enable FILTEK to quote the optimum design for your application.

Specifications

Electrical

Cutoff Frequency (Fco)
 Number of Sections Available
 Nominal Impedance
 Maximum VSWR
 Maximum Fco Insertion Loss
 Stopband Attenuation
 Average Power (Watts Max to 10K Feet)
 Peak Power (Watts Max to 10K Feet)

STANDARD

10 to 150 MHz
 3 to 6
 50 Ohms
 1.5/1
 See Chart Below
 See Curve page 50*
 1
 5

SPECIAL

10 to 450 Mhz
 2 to 10
 75 or 100 Ohms
 1.25/1
 See Chart Below
 See Curve Page 50*
 5
 25

*Page 50 in Full Catalog

Insertion Loss

The Maximum Insertion Loss in the passband is equal to:

(Loss Factor X Number of Sections) + .05 dB

Example:
 The Maximum loss for a 3 Section HP11 Series filter with Fco at 30 MHz is:

$(0.2 \times 3) + .05 = 065\text{dB}$

Cutoff Frequency (MHz)	10 to 15	16 to 20	21 to 30	31 to 50	51 to 150
Loss Factor	.22	.21	.20	.20	.20

Environmental

Vibration (10 to 2000 Hz)
 Shock (11 mSec)
 Humidity
 Operating Temperature
 Non-Operating Temperature

STANDARD

5 G
 15 G
 90% Relative
 0° to +50°C
 -25° to +75°C

SPECIAL

10 G
 30 G
 100% Relative
 -25° to +100°C
 -54° to +125°C